

# Sinclair

RIGID CORE WPC



DV750-C Windsong Oak



WATERPROOF



NOISE REDUCTION



STAIN RESISTANT



ATTACHED PAD



LIFETIME WARRANTY



CLICK INSTALLATION



# Sinclair

RIGID CORE WPC

**Construction:**

Rigid Core WPC Vinyl Plank

**Size:** 7-1/16" x 48"

**Total Thickness:**

7.5 mm (6 mm with 1.5 mm Attached EVA Pad)

**IIC Rating:** 69 db

**Texture:** Distressed | Embossed | Hand Scraped

**Edge Profile:** Micro-Bevel

**Finish:** Crystalguard™ Anti-Scratch Coating

**Installation Method:** Floating

**Click System:** Välinge 2G™

**Installation Level:**

On | Above | Below Grade

**Sq. Ft./Carton:** 23.64

**Cases/Pallet:** 60

**Sq. Ft./Pallet:** 1,418

**Warranties:**

Lifetime Residential  
15 Year Commercial

Coordinating Moldings Available



DV750-C Windsong Oak 7-1/16" x 48"



DV740-C Heatherstone 7-1/16" x 48"



DV751-C Long View Pine 7-1/16" x 48"




DV753-C Silver Spur Oak 7-1/16" x 48"




DV748-C Teak Harbor 7-1/16" x 48"




DV768-C Woodruff 7-1/16" x 48"

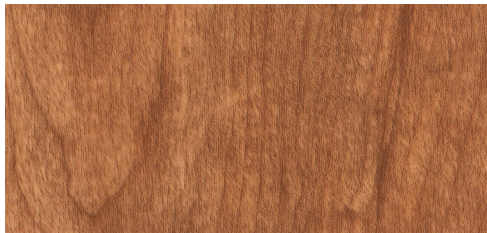


DV742-C Laurel Cherry 7-1/16" x 48"

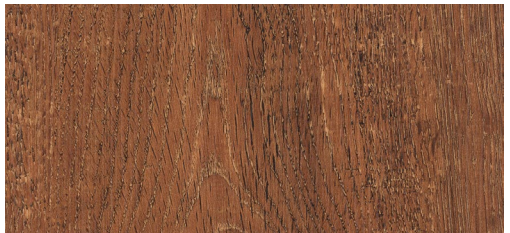


DV741-C Cordova Cherry 7-1/16" x 48"

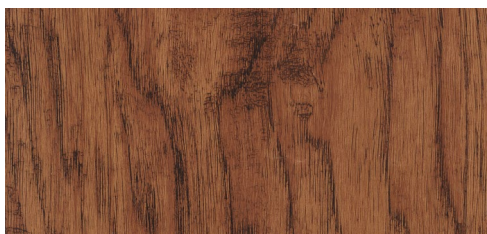

DV738-C Burnished Hickory 7-1/16" x 48"

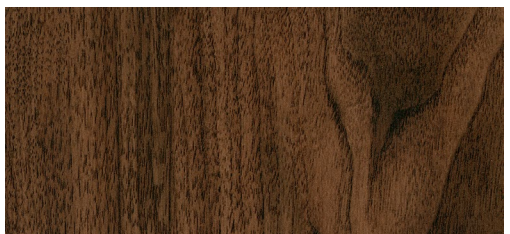

DV770-C Rustic 7-1/16" x 48"

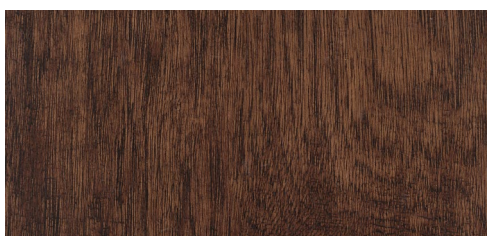

DV739-C Tavern Hickory 7-1/16" x 48"